




**ARCHITECTS SPECIFICATIONS  
MODEL 8343LS LED LINE SCORE BASEBALL SCOREBOARD**

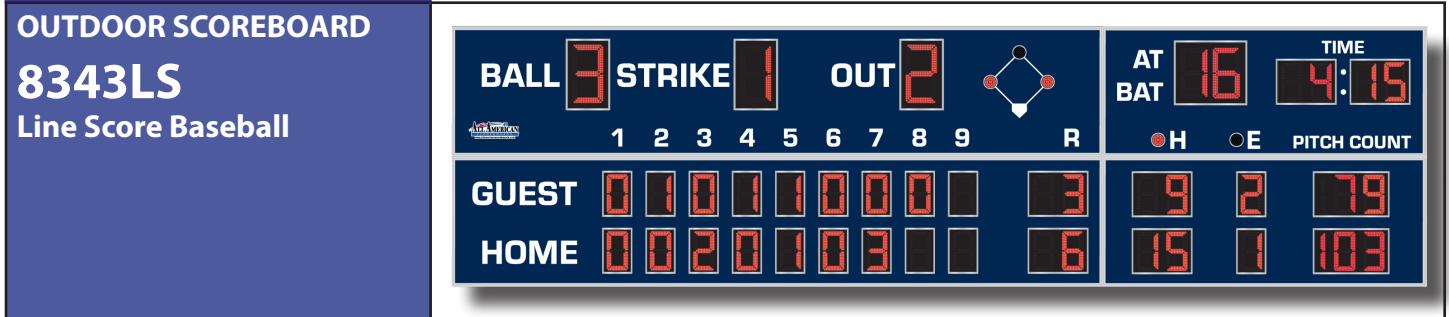

<b>OUTDOOR SCOREBOARD</b>	
<b>8343LS</b> Line Score Baseball	
<b>OVERALL DIMENSION</b>	8' high x 30' wide x 4.75" deep.
<b>INFORMATION DISPLAYED</b>	Home Line Score, Guest Line Score, Ball, Strike, Out, Runs, Hits, Errors, At Bat, Hit and Error Indicators, On Base Indicators, Game Time, Pitch Count
<b>DIGITS</b>	Bright Red, 7-Segment LEDs.
<b>SCORING</b>	14" High Digits, Inning shall register 0-9. Runs shall register 0-99.
<b>HITS</b>	14" High Digits, Shall register 0-99.
<b>ERRORS</b>	14" High Digits, Shall register 0-9.
<b>BALL</b>	21" High Digits, Shall Register 1-3, programmable for league rules.
<b>STRIKE</b>	21" High Digits, Shall Register 1-2, programmable for league rules..
<b>OUT</b>	21" High Digits, Shall Register 1-2, programmable for league rules..
<b>GAME TIME</b>	14" High Digits, Shall display Game Time or Time of Day.
<b>PITCH COUNT</b>	14" High Digits, Shall Register 1-199.
<b>AT BAT</b>	18" High Digits, Shall register 0-99.
<b>HIT or ERROR</b>	4" Bulls Eye, Displays on or off.
<b>RUNNERS ON BASE</b>	4" Bulls Eye, Displays runners on first, second and/or third base.
<b>CAPTIONS</b>	White vinyl letters.
<b>CONSTRUCTION</b>	4" extruded aluminum case, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Navy, Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).
<b>ELECTRONICS</b>	100% solid state, microprocessor controlled system.
<b>SERVICING</b>	Front access for ease of servicing. Plug in modules for ease of replacement.
<b>MICROPROCESSOR CONTROL CONSOLE</b>	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
<b>JUNCTION BOX</b>	One junction box 5" x 3" with cover and plug. (Hardwire)
<b>DATA CABLE</b>	Twisted pair, direct burial.
<b>POWER REQUIREMENTS</b>	115 VAC, 60 Hz. Minimum one 20A circuit is recommended.
<b>INSTALLATION</b>	May be installed on three posts. Mounting brackets are supplied with scoreboard.
<b>WEIGHT</b>	Net 980 lbs. / Shipping 1200 lbs.
<b>WARRANTY</b>	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.