
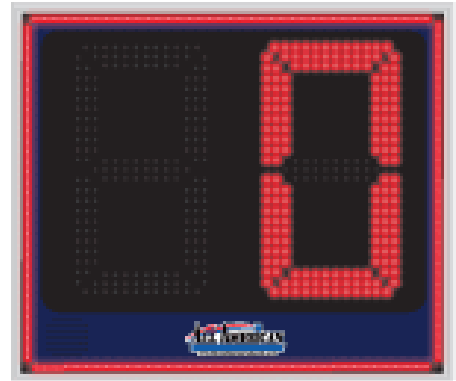


**INDOOR SCOREBOARD**

**8299scs**

**Shot Clock Strips**

**Basketball**

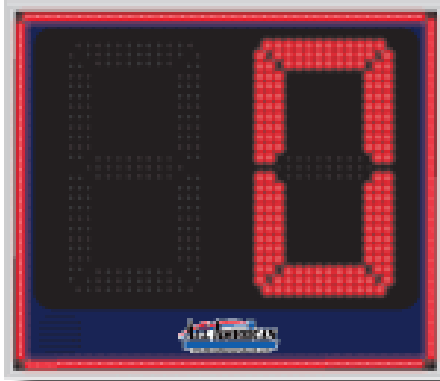

<b>OVERALL DIMENSION</b>	2' high x 2'2" wide x 5" deep.
<b>INFORMATION DISPLAYED</b>	Shot Clock Time. Contains 4 strips of ultra-bright red leds that will light when the shotclock reaches 0.
<b>DIGITS</b>	Bright Red, 7-Segment LEDs.
<b>SHOT CLOCK TIME</b>	14" High Red Digits, Shall register 0-99.
<b>CONSTRUCTION</b>	5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Purple, Maroon, Red, Forest Green, Green, custom colors available).
<b>ELECTRONICS</b>	100% solid state, microprocessor controlled system.
<b>HORN</b>	Includes internal 80dB tone horn. Internal 93 dB vibrating horn (EL00898P) available.
<b>SERVICING</b>	Front access for ease of servicing. Plug in modules for ease of replacement.
<b>MICROPROCESSOR CONTROL CONSOLE</b>	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
<b>JUNCTION BOX</b>	One junction box 5" x 3" with cover and plug. (Hardwire)
<b>DATA CABLE</b>	Twisted pair, direct burial, RJ45 Connectors.
<b>POWER REQUIREMENTS</b>	120VAC. Minimum one 20A circuit is recommended.
<b>INSTALLATION</b>	May be mounted to nearly any wall surface, or to Backboard.
<b>WEIGHT</b>	Net 20 lbs / Shipping 35 lbs (each).
<b>WARRANTY</b>	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.

