

8338LS Baseball Controller Plate

Scoreboard Type: 500

Power Supply Outputs:

POWER 1 (Quad):

P1.1 ≈ .5A P1.2 ≈ 3.90A

P1.3 ≈ 2.60A P1.4 ≈ 2.60A

POWER 2 (Quad):

P2.1 ≈ 3.87A P2.2 ≈ 3.87A

P2.3 ≈ 3.87A P2.4 ≈ 3.87A


POWER 3 (Quad):

P3.1 ≈ 3.87A P3.2 ≈ 2.90A

P3.3 ≈ 3.87A P3.4 ≈ 2.90A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

"TN" refers to the team name board output.

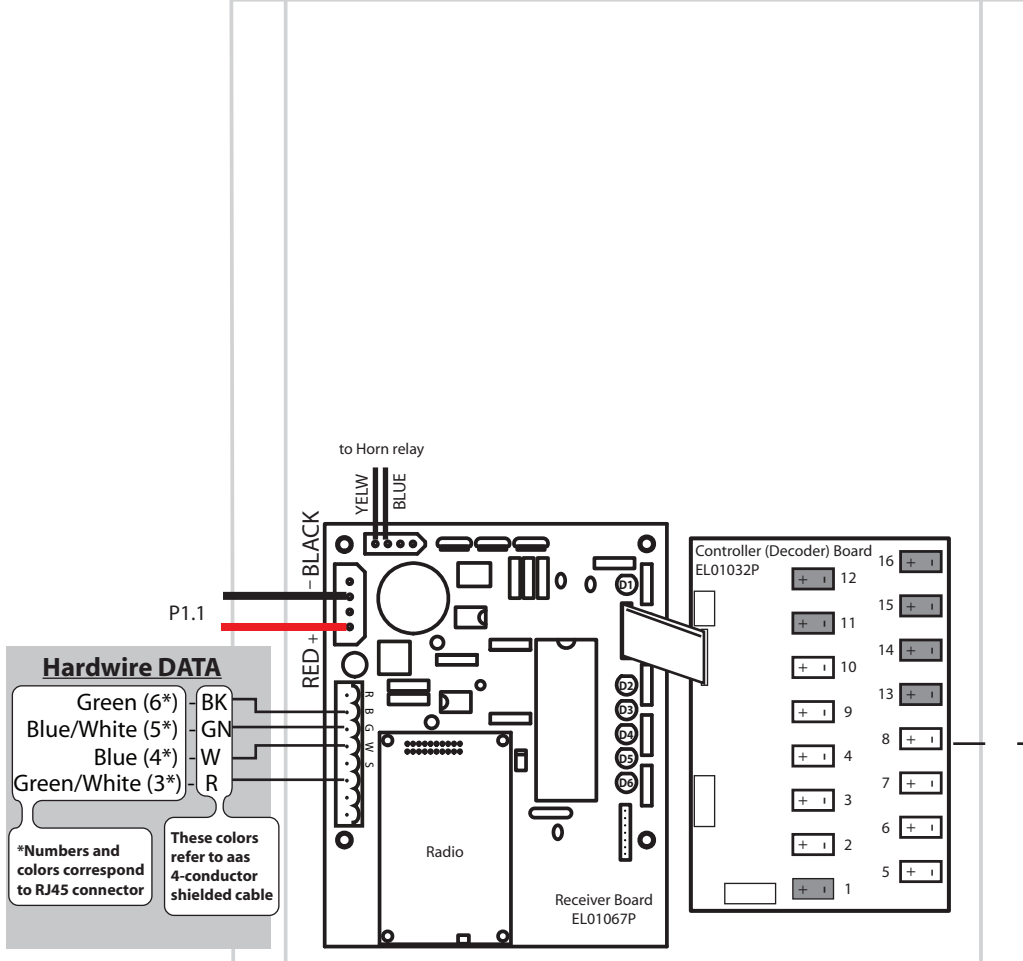

- OUTPUTS
- 2. Guest Runs, Inn 9,10
 - 3. Home Runs, Inn 9,10
 - 5. Ball, Strike, Out, H/E
 - 6. Guest Hits, Errors
Home Hits Errors
 - 7. Guest Inn 1-4
 - 8. Guest Inn 5-8
 - 9. Home Inn 1-4
 - 10. Home Inn 5-8
 - 12. Batter Number
- NOT USED
1,4,11,13-16

Hardwire DATA

Green (6*) BK
Blue/White (5*) GN
Blue (4*) W
Green/White (3*) R

*Numbers and colors correspond to RJ45 connector

These colors refer to aas 4-conductor shielded cable



All Digits in lower panels are 14"Red. — = DATA - - - - - = 10.5VDC POWER

115 VAC / 60 Hz - 9.0 Amps