


INDOOR SCOREBOARD
8218EMC
BASKETBALL
Wrestling
Volleyball
Segment Timer
+ Electronic Message Center



OVERALL DIMENSION	8'2" high x 12' wide x 5" deep.
INFORMATION DISPLAYED	Game Time, Home and Guest Score, Period, Time Outs Left, Fouls, Double Bonus, Possession. May also be used for wrestling and volleyball.
DIGITS	Bright Red and Amber, 7-Segment LEDs.
GAME TIME	18" High Red Digits, Shall register 0:00 - 99:59, 1/10 second capable. May display Time Of Day when not in use and during select sports.
SCORE	16" High Amber Digits, Shall register 0-199.
PERIOD	14" High Red Digits, Shall register 1-4.
T.O.L.	14" High Amber Digits, Shall Register 1-9.
FOULS	14" High Red Digits, Shall Register 1-19.
PLAYER	14" High Amber Digits, Shall Register 00-99.
PLAYER FOUL	14" High Amber Digits, Shall register 0-9.
POSSESSION	Indicated by 2" Red LED Indicators.
BONUS / DOUBLE BONUS	Indicated by 2" Amber LED Indicators.
CAPTIONS	White vinyl letters.
EMC	Built in Everbrite Message Center: a text only message center with 8" character height. Send 99 different looped programs and 99 different messages instantly during gameplay. Second console required for instant messages.
CONSTRUCTION	5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Violet, Maroon, Red, Forest Green, Green, custom colors available).
ELECTRONICS	100% solid state, microprocessor controlled system.
HORN	Includes external 100 dB horn. 120dB Trumpet horn is available.
SERVICING	Front access for ease of servicing. Plug in modules for ease of replacement.
MICROPROCESSOR CONTROL CONSOLE	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control available.
JUNCTION BOX	One junction box 5" x 3" with cover and plug. (Hardwire)
DATA CABLE	Twisted pair, direct burial, RJ45 Connectors.
POWER REQUIREMENTS	120VAC. Minimum one 20A circuit is recommended.
INSTALLATION	May be mounted to nearly any wall surface.
WEIGHT	Net 301 lbs / Shipping 420 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.

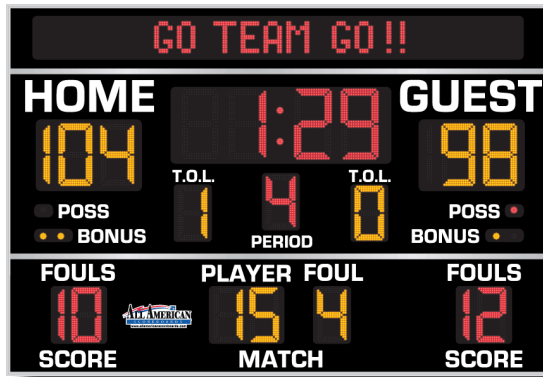