


**INDOOR SCOREBOARD**

**8214**

Basketball  
Volleyball  
Wrestling  
Segment Timing

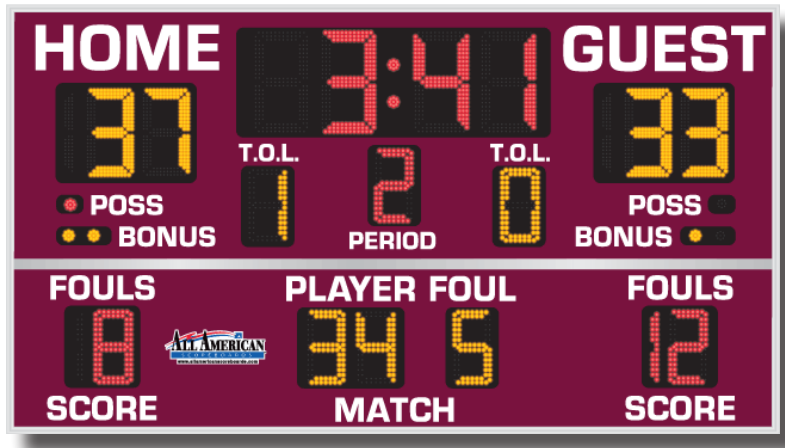

<b>OVERALL DIMENSION</b>	5'high x 9' wide x 5" deep.
<b>INFORMATION DISPLAYED</b>	Game Time, Home and Guest Score, Period, Time Outs Left, Fouls, Double Bonus, Possession. May also be used for wrestling, Volleyball and Segment Timing.
<b>DIGITS</b>	Bright Red and Amber, 7-Segment LEDs.
<b>GAME TIME</b>	14" High Red Digits, Shall register 0:00 - 99:59, 1/10 second capable.
<b>SCORE</b>	12" High Amber Digits, Shall register 0-199.
<b>PERIOD</b>	10" High Red Digit, Shall register 1-4.
<b>TIME OUTS LEFT</b>	10" High Amber Digits, Shall Register 1-9.
<b>FOULS</b>	10" High Red Digits, Shall Register 1-19.
<b>PLAYER</b>	10" High Amber Digits, Shall Register 00-99.
<b>PLAYER FOUL</b>	10" High Amber Digits, Shall register 0-9.
<b>POSSESSION</b>	Indicated by 2" Red LED Indicators.
<b>BONUS / DOUBLE BONUS</b>	Indicated by 2" Amber LED Indicators.
<b>CAPTIONS</b>	White vinyl letters. Electronic LED captions are available.
<b>HORN</b>	Includes external 100 dB horn. 120dB Trumpet horn is available.
<b>CONSTRUCTION</b>	5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Violet, Maroon, Red, Forest Green, Green, custom colors available).
<b>ELECTRONICS</b>	100% solid state, microprocessor controlled system.
<b>SERVICING</b>	Front access for ease of servicing. Plug in modules for ease of replacement.
<b>MICROPROCESSOR CONTROL CONSOLE</b>	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
<b>JUNCTION BOX</b>	One junction box 5" x 3" with cover and plug. (Hardwire)
<b>DATA CABLE</b>	Twisted pair, direct burial, RJ45 Connectors.
<b>POWER REQUIREMENTS</b>	120VAC. Minimum one 20A circuit is recommended.
<b>INSTALLATION</b>	May be mounted to nearly any wall surface.
<b>WEIGHT</b>	Net 156 lbs / Shipping 264 lbs.
<b>WARRANTY</b>	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.

