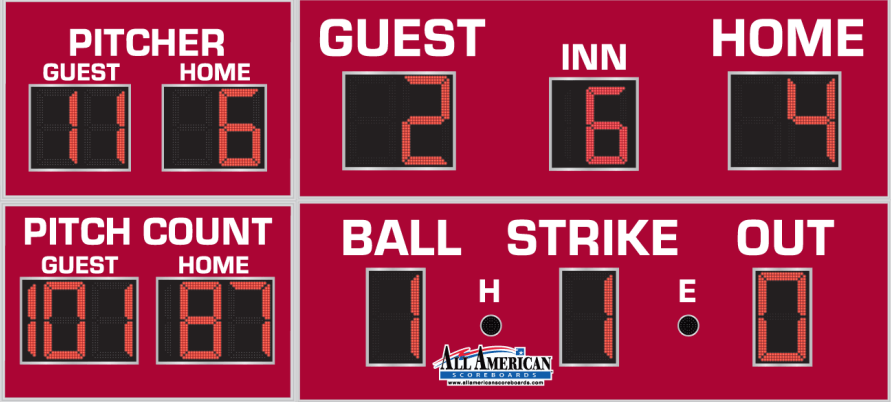


<p><b>SCOREBOARDS™</b> <b>OUTDOOR SCOREBOARD</b> <b>8321PC</b> Baseball</p>	
<b>OVERALL DIMENSION</b>	8' high x 18' wide x 4.75" deep.
<b>INFORMATION DISPLAYED</b>	Home Score, Guest Score, Ball, Strike, Out, Inning, Hits, Errors, Pitcher, Pitch Count
<b>DIGITS</b>	Bright Red, 7-Segment LEDs.
<b>SCORE</b>	21" High Digits, Shall register 0-99.
<b>INNING</b>	18" High Digits, Shall register 0-19.
<b>BALL</b>	21" High Digits, Shall Register 1-3.
<b>STRIKE</b>	21" High Digits, Shall Register 1-2.
<b>OUT</b>	21" High Digits, Shall Register 1-2.
<b>HIT/ERROR INDICATORS</b>	4" Bulls Eye, Displays Hit or Error.
<b>PITCHER</b>	18" High Digits, Shall Register 00-99.
<b>PITCH COUNT</b>	18" High Digits, Shall Register 0-199.
<b>CAPTIONS</b>	White vinyl letters.
<b>CONSTRUCTION</b>	4" extruded aluminum case, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Navy, Dark Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).
<b>ELECTRONICS</b>	100% solid state, microprocessor controlled system.
<b>SERVICING</b>	Front access for ease of servicing. Plug in modules for ease of replacement.
<b>MICROPROCESSOR CONTROL CONSOLE</b>	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
<b>JUNCTION BOX</b>	One junction box 5" x 3" with cover and plug. (Hardwire)
<b>DATA CABLE</b>	Twisted pair, direct burial, RJ45 Connectors.
<b>POWER REQUIREMENTS</b>	115 VAC, 60 Hz. Minimum one 20A circuit is recommended.
<b>INSTALLATION</b>	May be installed on two posts. Mounting brackets are supplied with scoreboard.
<b>WEIGHT</b>	Net 600 lbs. / Shipping 800 lbs.
<b>WARRANTY</b>	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.