


OUTDOOR SCOREBOARD
8339XLSTN
Line Score Baseball

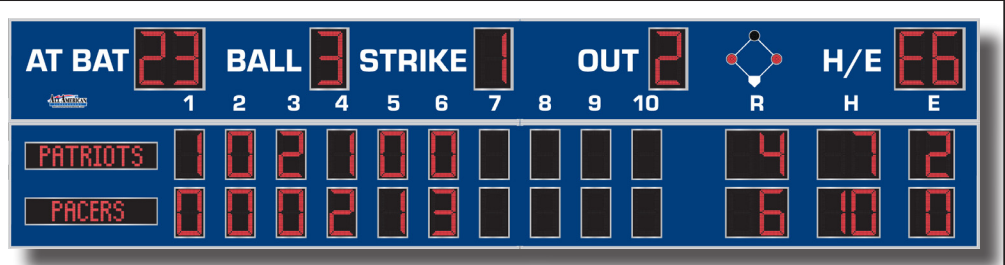

OVERALL DIMENSION	9' high x 38' wide x 4.75" deep.
INFORMATION DISPLAYED	Home Line Score, Guest Line Score, Ball, Strike, Out, Runs, Hits, Errors, At Bat, Hit or Error, On Base Indicators
DIGITS	Bright Red, 7-Segment LEDs.
SCORING	21" High Digits, Inning shall register 0-9. Runs shall register 0-99.
HITS	21" High Digits, Shall register 0-99.
ERRORS	21" High Digits, Shall register 0-19.
BALL	24" High Digit, Shall Register 0-4 (programmable up to 9).
STRIKE	24" High Digit, Shall Register 0-3 (programmable up to 9).
OUT	24" High Digit, Shall Register 1-3 (programmable up to 9).
AT BAT	24" High Digits, Shall register 00-09, 0-99.
HIT or ERROR	24" High Digits, Shall Register E, E1-E9, H.
RUNNERS ON BASE	4" Bulls Eye, Displays runners on first, second and/or third base.
ELECTRONIC TEAM NAMES	8.5" LED cations, 8x48 Matrix (4 LEDs per Pixel). Displays 8-12 characters.
CAPTIONS	White vinyl letters.
CONSTRUCTION	4" extruded aluminum case, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Navy, Blue, Bright Blue, Purple, Maroon, Red, Forest Green, Green, custom colors available).
ELECTRONICS	100% solid state, microprocessor controlled system.
SERVICING	Front access for ease of servicing. Plug in modules for ease of replacement.
MICROPROCESSOR CONTROL CONSOLE	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
JUNCTION BOX	One junction box 5" x 3" with cover and plug. (Hardwire)
DATA CABLE	Twisted pair, direct burial, RJ45 Connectors.
POWER REQUIREMENTS	115 VAC, 60 Hz. Minimum one 20A circuit is recommended.
INSTALLATION	May be installed on four posts. Mounting brackets are supplied with scoreboard.
WEIGHT	Net 1400 lbs. / Shipping 1700 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.