
## PRODUCT SPECIFICATIONS LINESCORE BASEBALL SCOREBOARD



outdoor scoreboard <b>BA9240</b> + 2 OPTIONS	Choose 2 Available Options:       AT BAT E       HIT/ERROR E       PITCH COUNT       PITCH SPEED         At BAt (AB)       Hit/Error (HE)       Graphics (G)       Pitch Count (PC)       Pitch Speed (PS)
BA9240 + LEFT OPTION + RIGHT OPTION	AT BAT 1 2 3 4 5 6 7 8 9 10 R H E
2	
STANDARD COLORS (CUSTOM COLORS AVAILABLE) BLACK NAVY BLUE LIGHT PURPLE BURGUNDY RED FOREST GREEN	BA9240ABHE Too many options? See the BA9240 Spec Sheet.
OVERALL DIMENSION	8' High x 24' Wide x 5" Depth. Additional 1.5" mounting flange on top and bottom. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal. 2 Cabinet Installation.
INFORMATION	Home & Guest 10 Inning Line Score (14"). Runs, Hits, Errors (14") Hits, Ball, Strike, Out (18"). Two Additional Options (Graphics or 18" Digits)
CAPTIONS	White vinyl captions: Home, Guest (8"). Innings, R, H, E (6.5"). Ball, Strike, Out (8"). Available graphic area of approx. 3'x6' (Standard on Base Model Only).
HORN	Not Included. Optional 100dB or 110 dB horn available. Recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the home runs face to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 3.9 to 5.2 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/beams. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to mount by drilling through the scoreboard flange and I-beam. Pressure and additional clamping systems available. Pole/beam installations require supplied mounting bar on flange.
ESTIMATED WEIGHT	755 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ( )	Hit/Error(HE), At Bat(AB), Pitch Count(PC), Home and Guest Pitch Count (PC2), Pitch Speed(PS) on either side of Ball Strike Out. Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	<b>MSC9000 (Multi-sport Desktop Console)</b> Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet.

## PRODUCT SPECIFICATIONS **BA9240 + 2 OPTIONS**




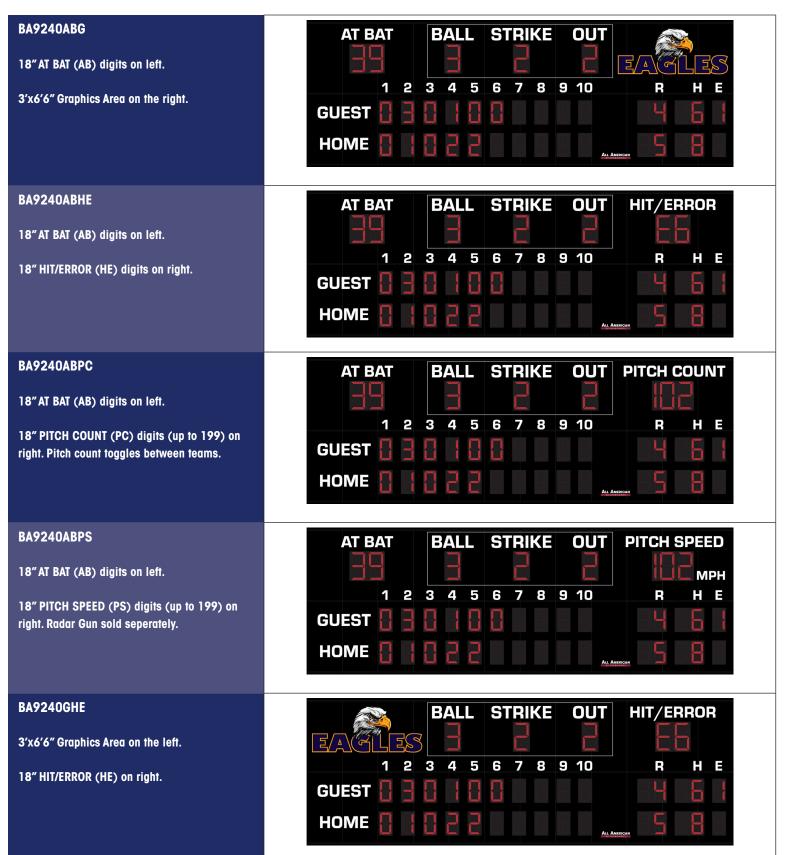

www.allamericanscoreboards.com • Specifications subject to change without notice • Made in USA

## PRODUCT SPECIFICATIONS BA9240 + 2 OPTIONS



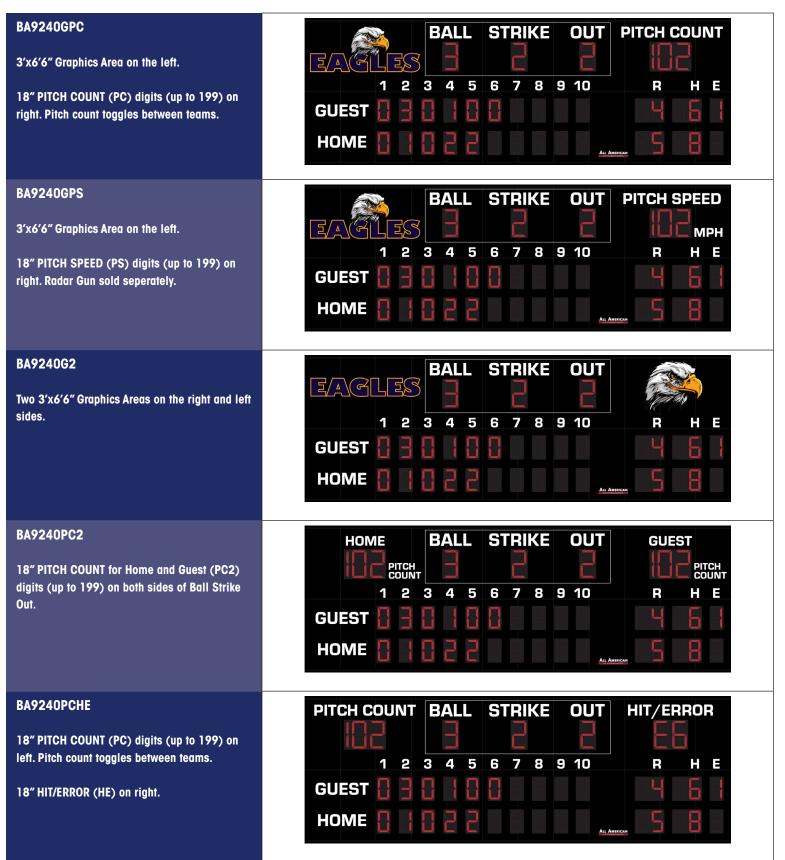

www.allamericanscoreboards.com • Specifications subject to change without notice • Made in USA

## PRODUCT SPECIFICATIONS BA9240 + 2 OPTIONS



