

QTY	Ref	Item Number	Description
5'	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,O/P
4.5'	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
12'	3	025-00057	WIRE,TWSTD,18AWG,O/V BLK/JACKET
41'	4	W100134P	CABLE,18/2 R/B GRV JKT 105C
7	C1	030-00109	Plug, 8PIN, 5.08mm,BLK/ORG
11	C2	030-00104	Plug, 2PIN, 2.08mm,BLK/ORG
4	C3	030-00107	Plug, 4PIN, 5.08mm, BLK/ORG
1	P1	062-00189	PWRSPLY,24V,96W
9"	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
82	-	030-00112	BULK,FERRULE,.75/.14MM WHT
2	-	030-00113	TWIN,FERRULE,.75/.14MM WHT

Cable specification [length (cable reference)]

030-00109



Pin 1

030-00104





Pin 1

030-00107



Pin 1

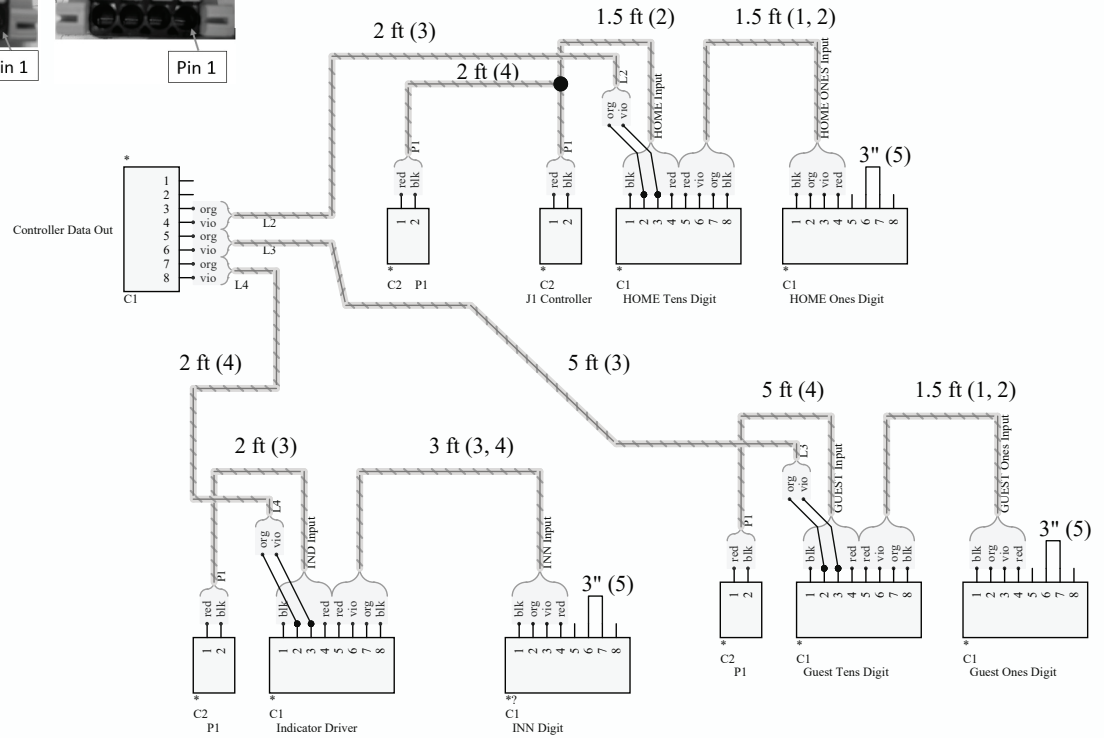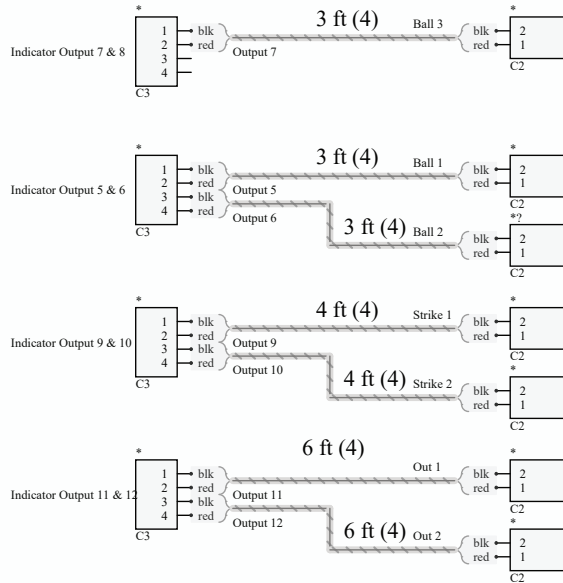

**Instructions**

1. Cut the cable (refer to the reference number) to length. Label each ends.
2. Crimp ferrule, 030-00112 to the ends of each cable wire.
3. Insert wire into connectors (C1, C2, C3) according to pinout.

Revision Control  
A. Add connector pinout, update indicator output and update length

BA9061 Harnesses

**ALL AMERICAN**  
SCOREBOARDS®