
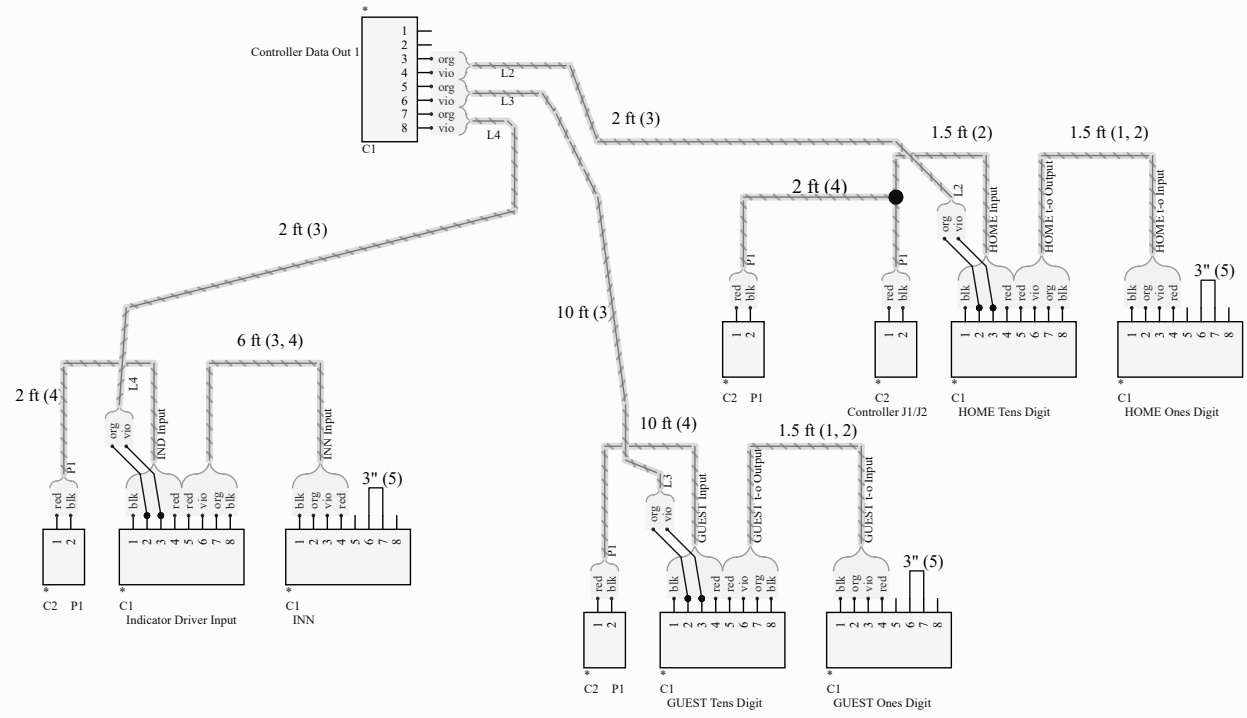
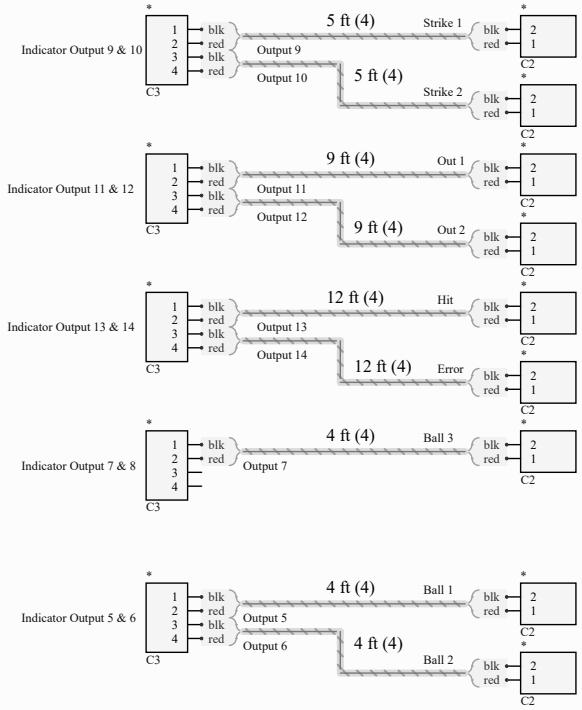



QTY	Ref	Item Number	Description
3'	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,O/P
4.5'	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
20'	3	025-00057	WIRE,TWSTD,18AWG,O/V BLK/JACKT
84'	4	W100134P	CABLE,18/2 R/B GRY JKT 105C
7	C1	030-00109	Plug, 8PIN, 5.08mm,BLK/ORG
13	C2	030-00104	Plug, 2PIN, 2.08mm,BLK/ORG
5	C3	030-00107	Plug, 4PIN, 5.08mm, BLK/ORG
1	P1	062-00189	PWRSPLY,24V,96W
9"	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
90	-	030-00112	BULK,FERRULE,.75/14MM WHT
2	-	030-00113	TWIN,FERRULE,.75/14MM WHT

Cable specification [length (cable reference)]



- Instructions
1. Cut the cable (refer to the reference number) to length. Label each end.
 2. Crimp ferrule, 030-00113 to Controller J1/J2 connector
 3. Crimp ferrule, 030-00112 to the ends of each cable wire.
 4. Insert wire into connectors (C1, C2, C3) according to pinout.