


QTY	Ref	Item Number	Description
8'	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,O/P
9'	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
20'	3	025-00057	WIRE,TWSTD,18AWG,O/V BLK/JACKT
22'	4	WI00134P	CABLE,18/2 R/B GRY JKT 105C
10	C1	030-00109	Plug, 8PIN, 5.08mm,BLK/ORG
5	C2	030-00104	Plug, 2PIN, 2.08mm,BLK/ORG
1	P1	062-00189	PWRSPLY,24V,96W
1'	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
80	-	030-00112	BULK,FERRULE,75/.14MM WHT
2	-	030-00113	TWIN,FERRULE,75/.14MM WHT

Cable specification [length (cable reference)]

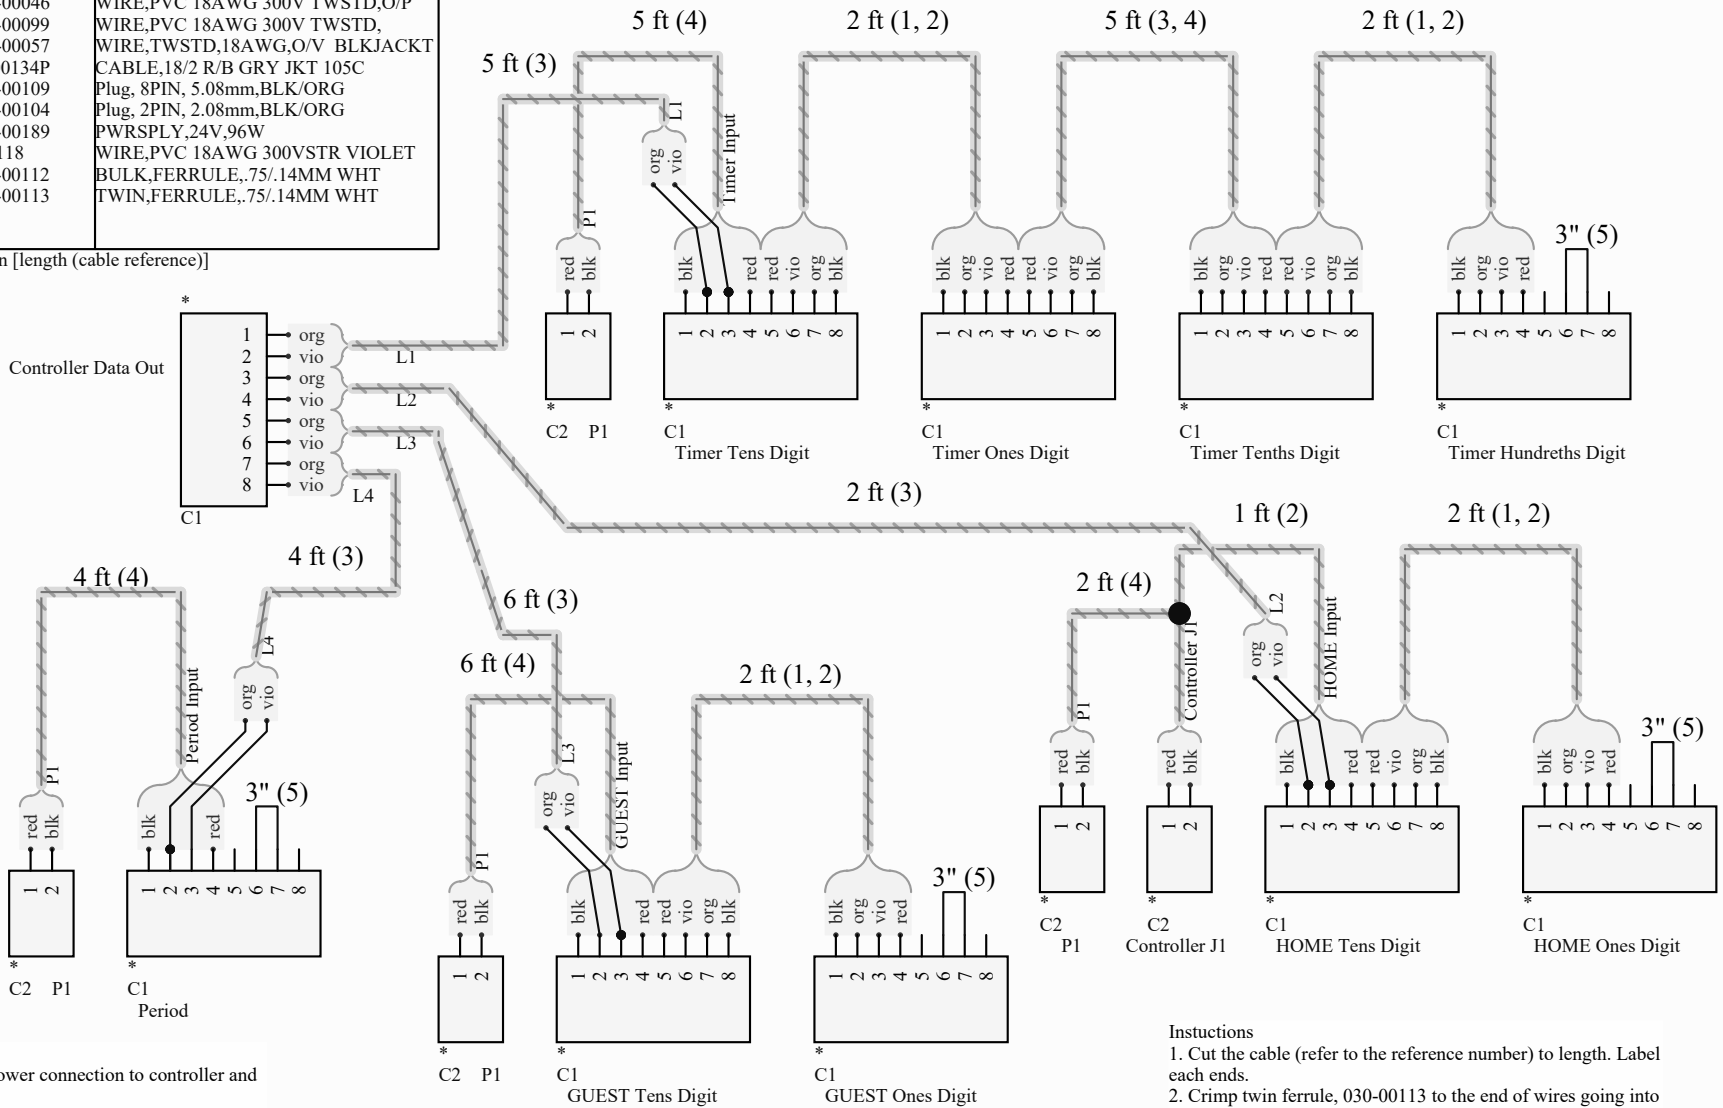

Revision

- A. Update power connection to controller and label update.

Instructions

1. Cut the cable (refer to the reference number) to length. Label each ends.
2. Crimp twin ferrule, 030-00113 to the end of wires going into C2 Controller.
3. Crimp ferrule, 030-00112 to the ends of each cable wire.
4. Insert wire into connectors (C1, C2, C3) according to pinout.

030-00109




Pin 1

030-00107



Pin 1

030-00104



Pin 1

Title

FB9083 Harnesses

**ALL AMERICAN**  
SCOREBOARDS®