
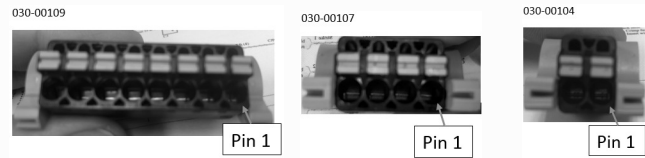


QTY	Ref	Item Number	Description
12'	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,O/P
13'	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
47'	3	025-00057	WIRE,TWSTD,18AWG,O/V BLK/JACKET
64'	4	W100134P	CABLE,18/2 R/B GRV JKT 105C
15	C1	030-00109	Plug, 8PIN, 5.08mm,BLK/ORG
10	L2	030-00104	Plug, 2PIN, 2.08mm,BLK/ORG
1	C3	030-00107	Plug, 4PIN, 5.08mm, BLK/ORG
1	P1	062-00189	PWRSPLY,24V,96W
1	P2	062-00189	PWRSPLY,24V,96W
1.25'	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
1.26'	6	030-00112	BULK,FERRULE,.75/.14MM WHT
2	7	030-00113	TWIN,FERRULE,.75/.14MM WHT

Cable specification [length (cable reference)]

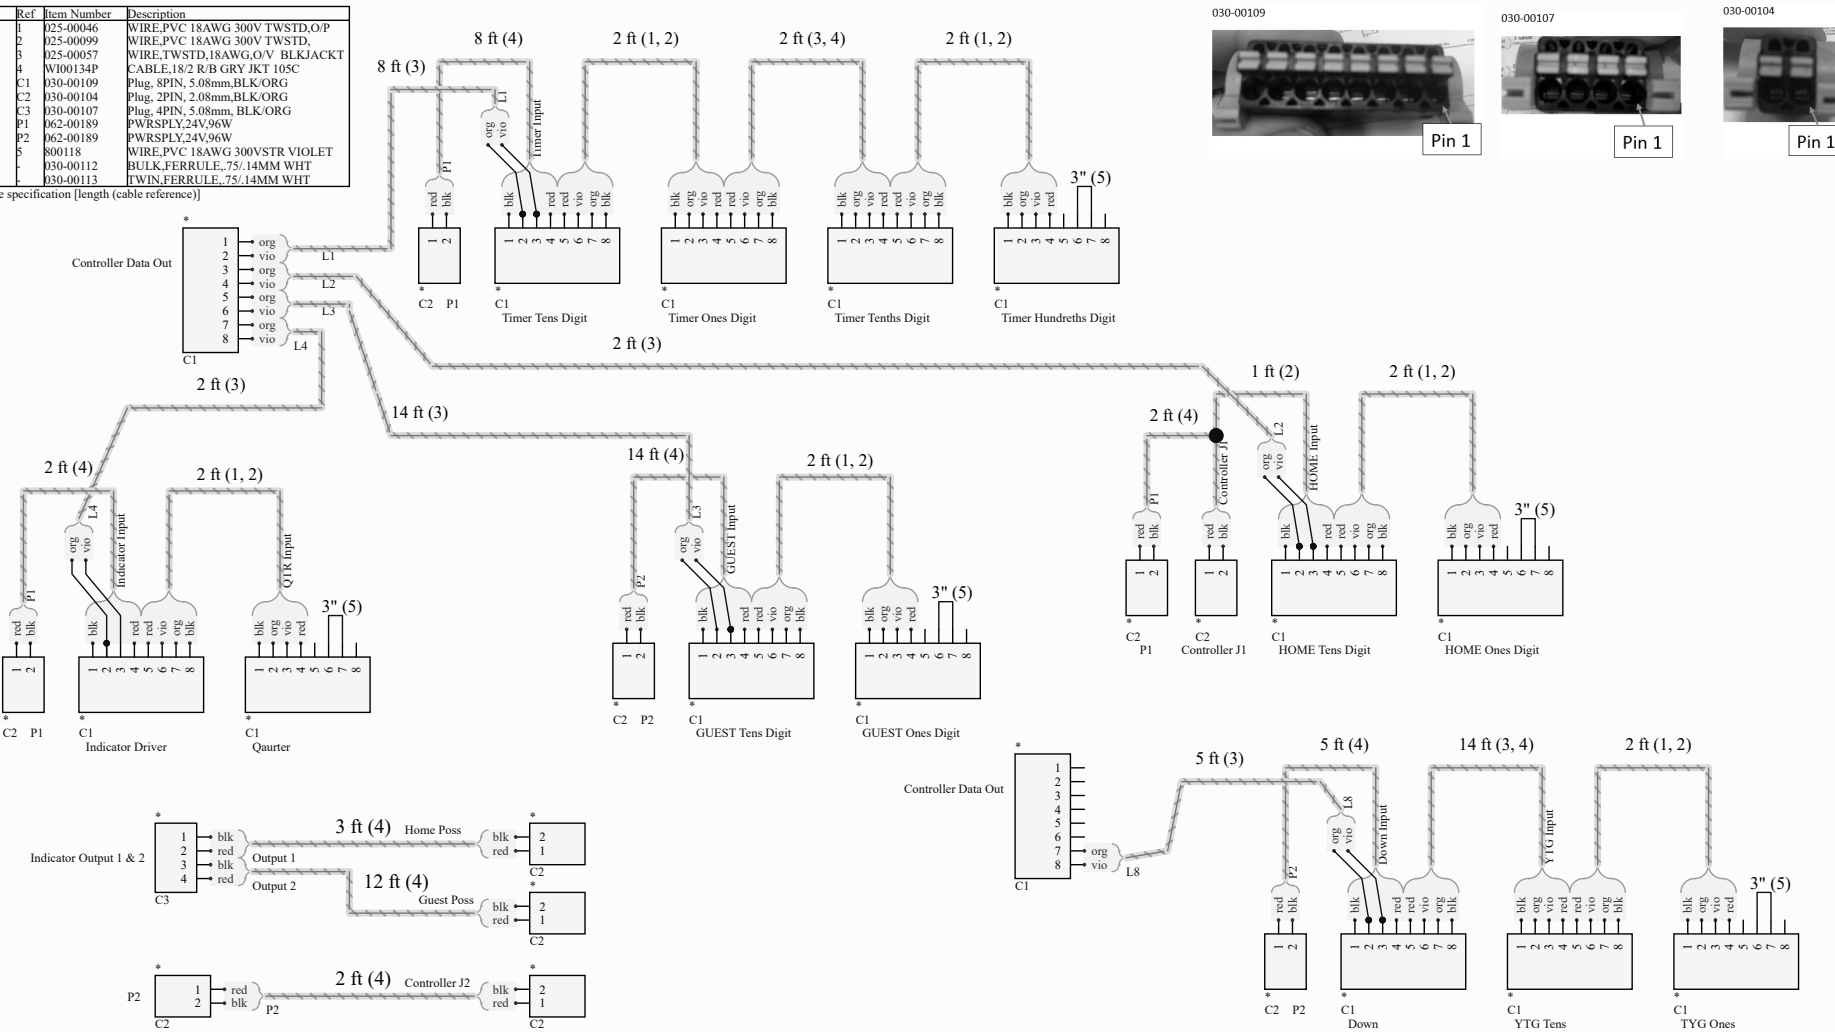

- Instructions
1. Cut the cable (refer to the reference number) to length. Label each end.
 2. Crimp twin ferrule, 030-00113 to the end of wires going into C2 Controller.
 3. Crimp ferrule, 030-00112 to the ends of each cable wire.
 4. Insert wire into connectors (C1, C2, C3) according to pinout.

Title * FB9145 Harnesses

