
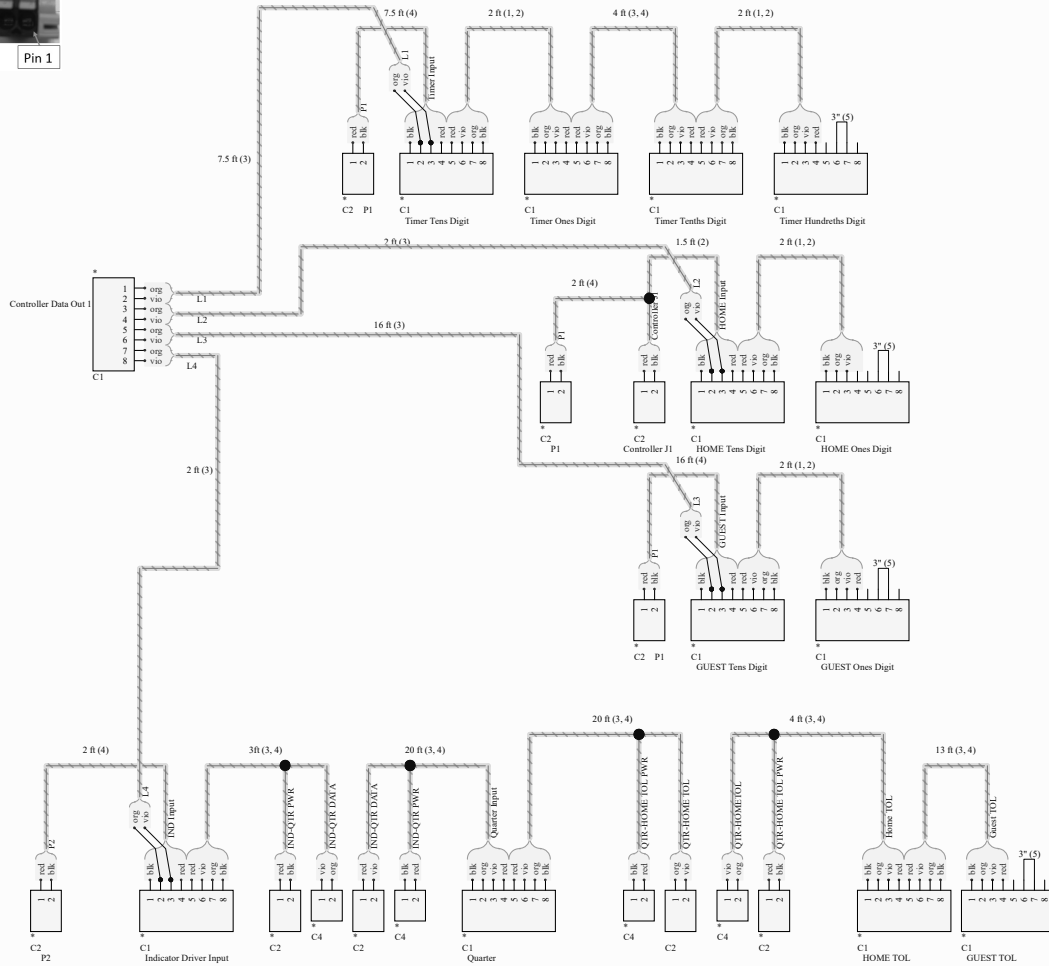
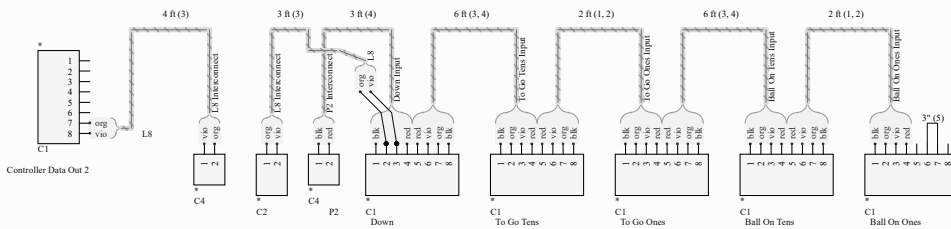






Qty	Ref	Item Number	Description
12	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,OP
13.5	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
110.5	3	025-00057	WIRE,TWSTD,18AWG,OV, BLK,JACKET
333.5	4	W001349	E-ABLE,1/32 RB GRV RKT 105C
19	C1	030-00109	Plug, SPIN, 5.08mm,BLK,ORG
15	C2	030-00104	Plug, 2PIN, 2.08mm,BLK,ORG
1	C3	030-00107	Plug, 4PIN, 5.08mm, BLK,ORG
6	C4	030-00106	CONN,SOCKET,2PIN,5.08MM BLACK
1	P1	062-00189	PWR,SPLY,24V,96W
1	P2	062-00189	PWR,SPLY,24V,96W
15	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
182	1	030-00112	BULK,FERRULE,75/14MM WHI
7	2	030-00113	BULK,FERRULE,75/10MM WHI

Cable specification [length (cable reference)]



- Instructions
1. Cut the cable (refer to the reference number) to length. Label each end.
 2. Crimp ferrule, 030-00112 to the ends of each cable wire.
 3. Crimp ferrule, 030-00113 to specified wires.
 4. Insert wire into connectors (C1, C2, C3) according to pinout.

Revision Control
 A. Quarter placement correction. Added more data and power cable connections.
 B. Revise cable length and indicator pinout

Title: **FB9184(TOL) Harnesses**