

Qty	Ref	Item Number	Description
12	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,OP
13.5	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
141	3	025-00057	WIRE,TWSTD,18AWG,OP,V BLK/JACKT
744	4	W001349	E-ABLE,182 RB GRG RKT 105C
19	C1	030-00109	Plug, SPIN, 5.08mm,BLK,ORG
15	C2	030-00104	Plug, 2PIN, 2.08mm,BLK,ORG
3	C3	030-00107	Plug, 4PIN, 5.08mm, BLK,ORG
6	C4	030-00106	CONN,SOCKET,2PIN,5.08MM BLACK
1	P1	062-00189	PWRSPLY,24V,96W
1	P2	062-00189	PWRSPLY,24V,96W
15	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
182	1	030-00112	BULK,FERRULE,75/14MM WHT
7	2	030-00113	FWM,FERRULE,75/14MM WHT

Cable specification [length (cable reference)]

030-00109



Pin 1



030-00104



Pin 1



Pin 1

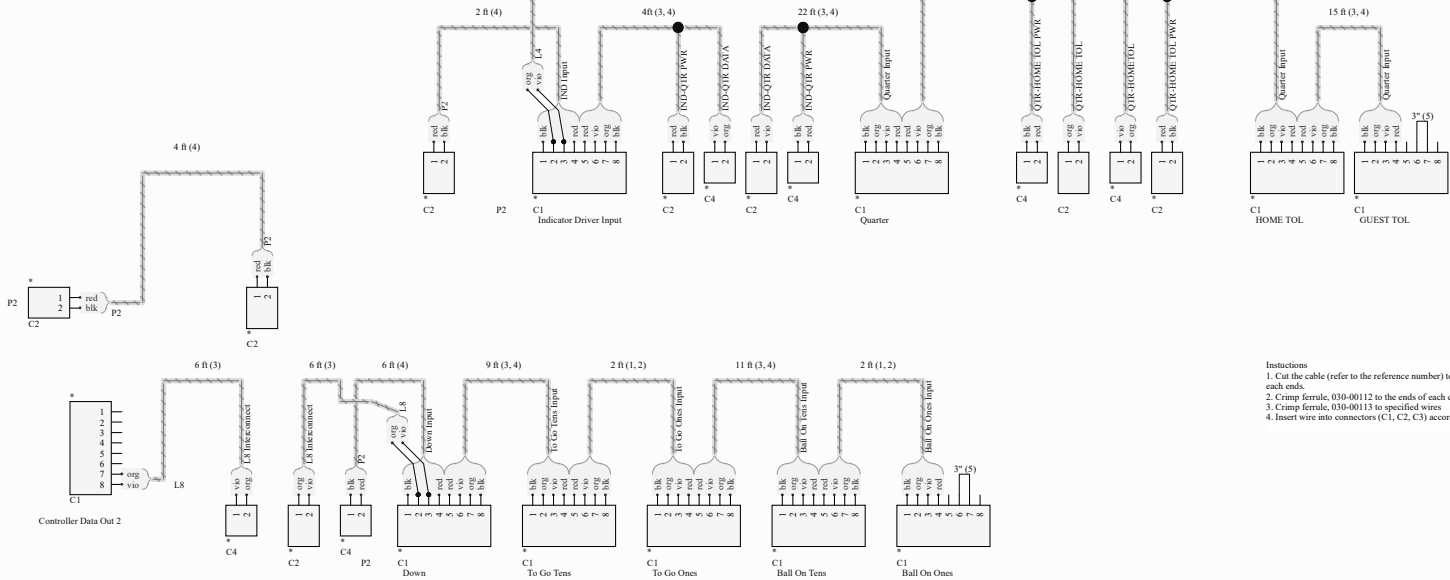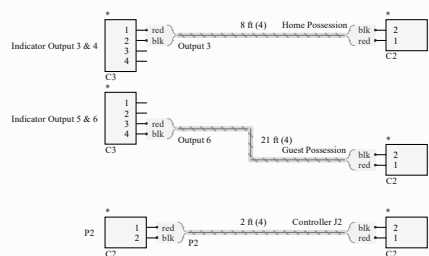

- Instructions
1. Cut the cable (refer to the reference number) to length. Label each end.
 2. Crimp ferrule, 030-00112 to the ends of each cable wire.
 3. Crimp ferrule, 030-00113 to specified wires.
 4. Insert wire into connectors (C1, C2, C3) according to pinout.