

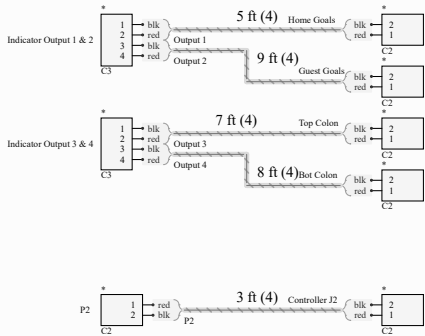


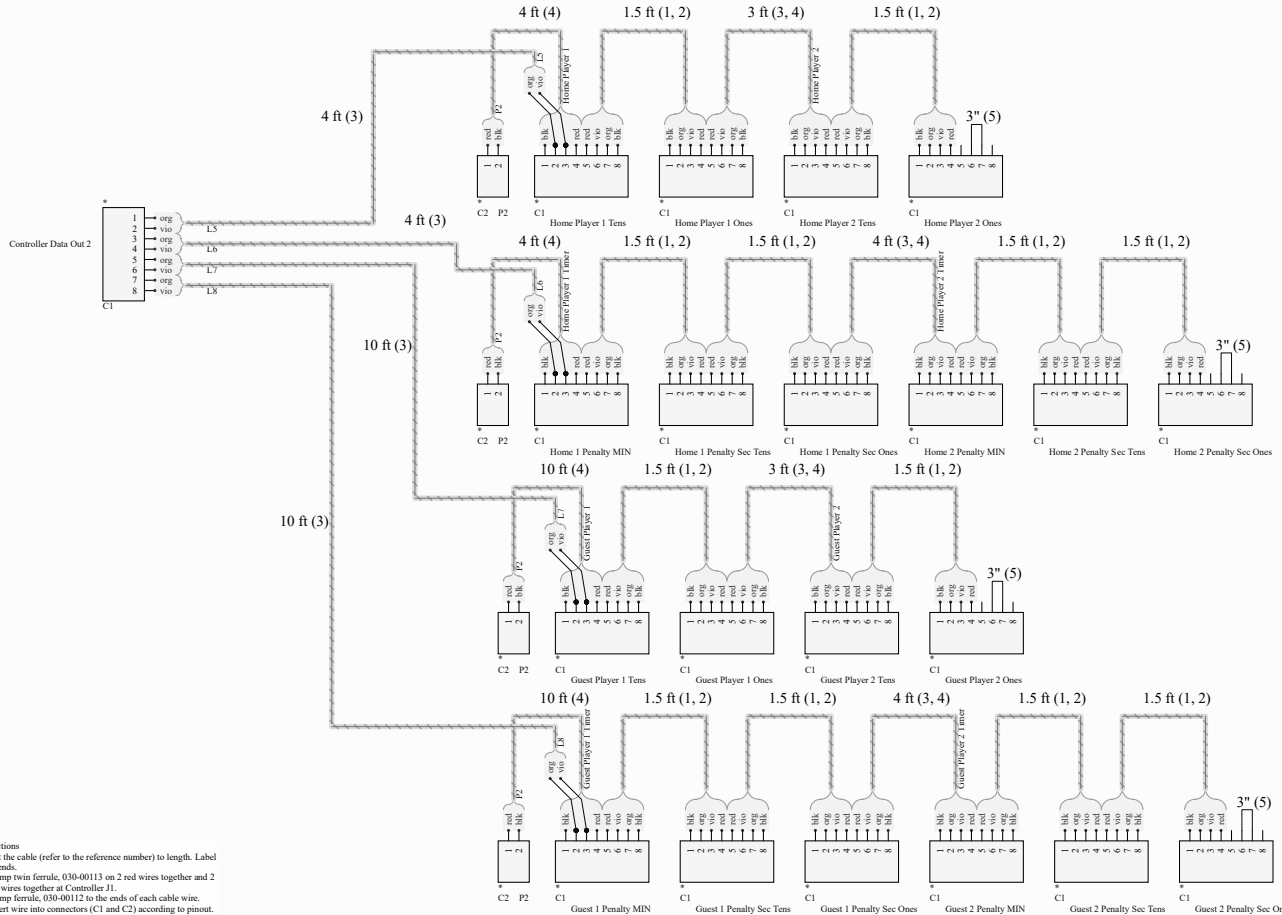

QTY	Ref	Item Number	Description
28	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,OP
29	5	025-00099	WIRE,PVC 18AWG 300V TWSTD,
72	3	025-00097	WIRE,TWSTD,18AWG,OVV BLK,ACKT
104	4	W100134P	CABLE,18/2 R/B GRV JKT 105C
32	C1	030-00109	Plug, 8PIN, 5.08mm, BLK,ORG
15	C2	030-00104	Plug, 2PIN, 2.08mm, BLK,ORG
2	C3	030-00107	Plug, 4PIN, 5.08mm, BLK,ORG
1	P1	062-00189	PWRSPLY,24V56W
1	P2	062-00189	PWRSPLY,24V56W
2	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
276	1	030-00112	BLK,FERRULE,75/18MM WHT
2	1	030-00113	TWIN,FERRULE,75/19MM WHT

Cable specification [length (cable reference)]

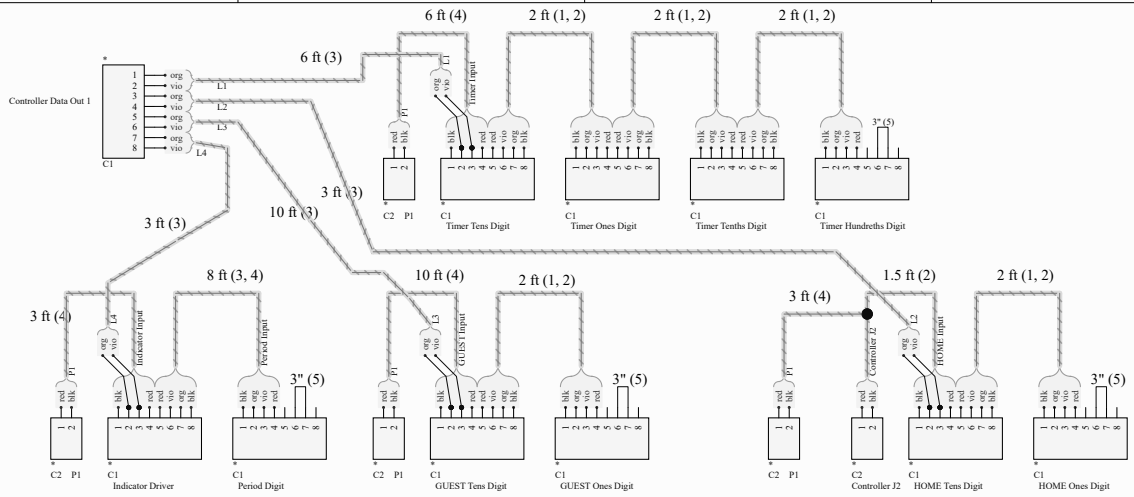

- Instructions
1. Cut the cable (refer to the reference number) to length. Label each end.
  2. Crimp twin ferrule, 030-00113 on 2 red wires together and 2 black wires together at Controller J1.
  3. Crimp ferrule, 030-00112 to the ends of each cable wire.
  4. Insert wire into connectors (C1 and C2) according to pinout.